



## SCHOTTKY BARRIER RECTIFIER

1N5817 THRU 1N5819

VOLTAGE RANGE  
CURRENT


20 to 40 Volts  
1.0 Ampere

### FEATURES

- Fast switching.
- Low forward voltage, high current capability.
- Low power loss, high efficiency.
- High current surge capability.
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length  
at 5 lbs. (2.3kg) tension.

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Polarity: Color band denoted cathode end.
- Lead: Plastic axial lead, solderable per MIL - STD - 202E  
method 208C
- Mounting position : Any
- Weight: 0.012 ounce, 0.33 gram

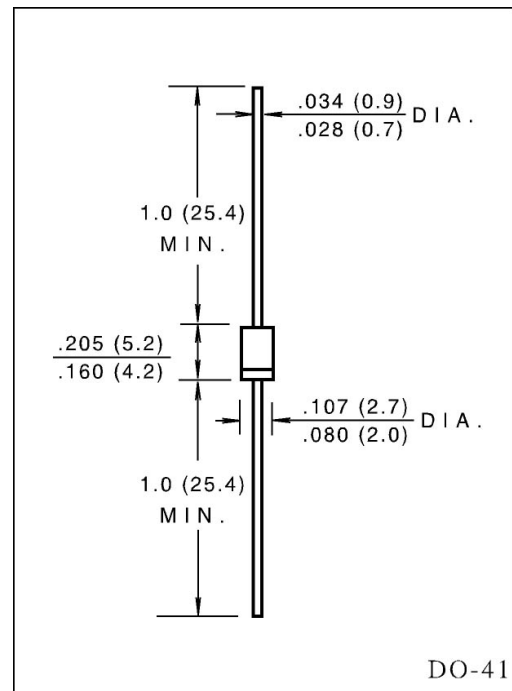

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	1N5817	1N5818	1N5819	UNIT	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	30	40	Volts	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	Volts	
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead length at $T_L = 90^\circ\text{C}$	$I_{(AV)}$	1.0			Amp	
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method )	$I_{FSM}$	25			Amps	
Maximum Instantaneous Forward Voltage (Note 1) at	1.0A	$V_F$	0.450	0.550	0.600	Volts
	3.0A		0.750	0.875	0.900	
Maximum DC Reverse Current at rated DC blocking voltage (Note 1)	$T_A = 25^\circ\text{C}$	$I_R$	1.0			mA
	$T_A = 100^\circ\text{C}$		10			
Typical Junction Capacitance (Note 2 )	$C_j$	110			pF	
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	50			°C/W	
Operating and Storage Temperature Range	$T_J, T_{STG}$	(-55 to +125)			°C	

### NOTES:

1. Pulse test: 300  $\mu\text{s}$  pulse width, 1% duty cycle.
2. Measured at 1MHz and applied reverse voltage of 4.0 volts.
3. Thermal resistance from junction to ambient P.C.B. mounted with 0.375" (9.5mm) lead length with 1.5" x 1.5"  
(38 X 38mm) copper pads.

# RATINGS AND CHARACTERISTIC CURVES IN5817 THRU IN5819

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

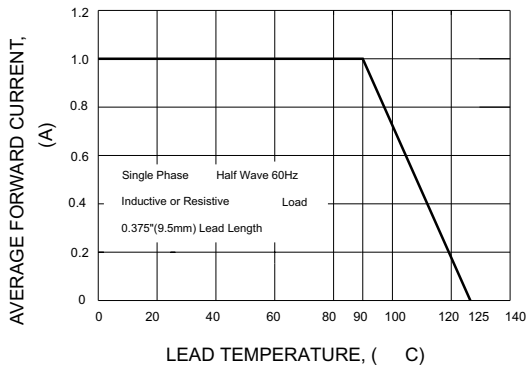


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

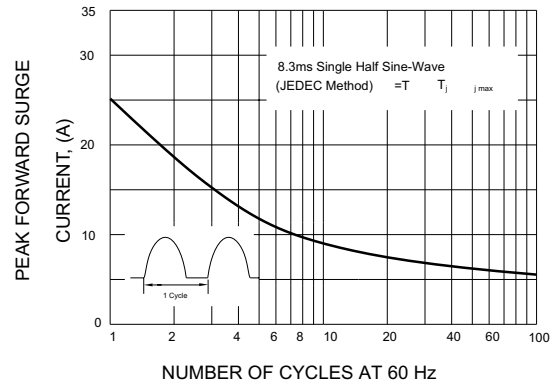


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

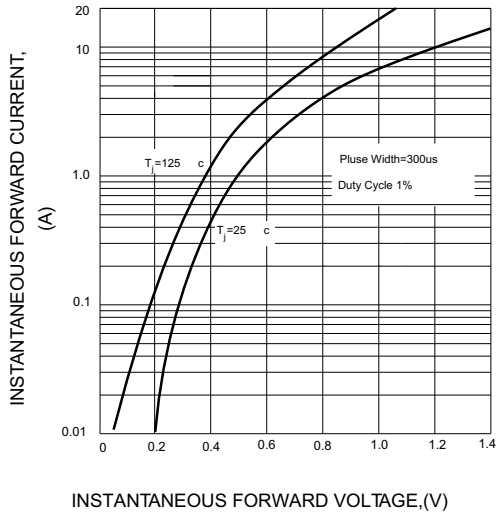


FIG.4-TYPICAL REVERSE CHARACTERISTICS

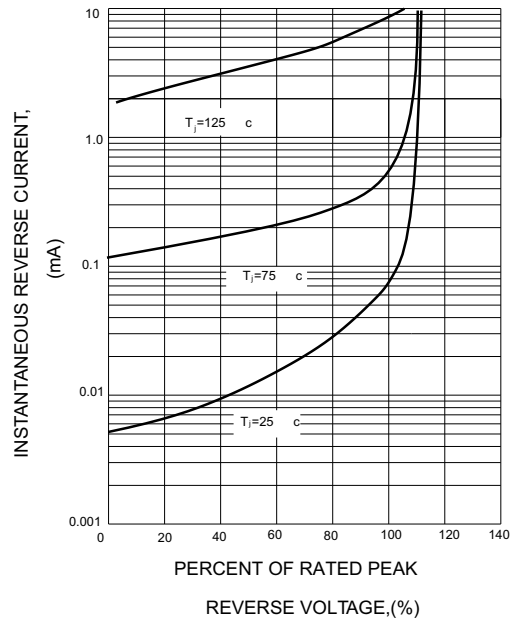


FIG.5-TYPICAL JUNCTION CAPACITANCE

